


E BAND RECEIVER EBVR

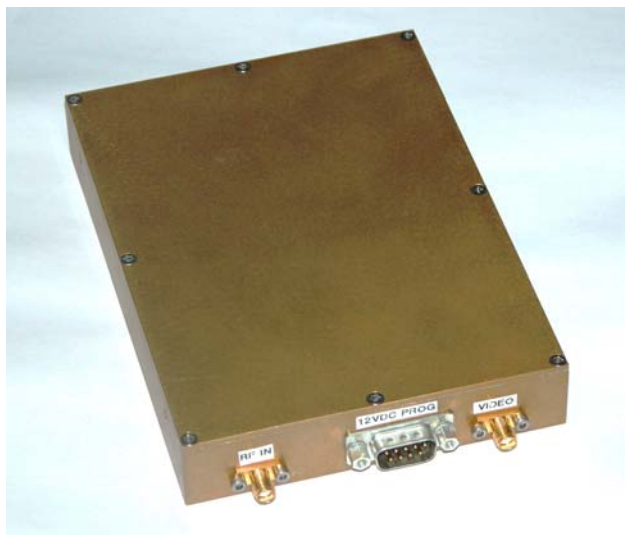

VIDEO RECEIVER

- Frequency range: 2200 to 2400 MHz.
- Noise figure: < 2 dB.
- Dynamic input: -20 dBm to -85 dBm.
- Maximum input level : +10 dBm.
- Sensibility: - 80 dBm for 10 dB SINAD.
- Synthesized.
- Programming increments: 125 kHz step.
- Frequency accuracy: ± 15 ppm at 25 °C.
- Frequency stability: ± 20 ppm from -10°C to +70°C.
- Demodulation: FM
- Output : video PAL /NTSC CCIR 405, 75 Ohms

POWER REQUIREMENT

- 12 V DC (9 V min to 18 V max).
or 28 V DC (18 V min to 36 V) (factory setting).
- < 500 mA for 12 V.
- < 500 mA for 28 V.
- Reverse polarity protection.

ENVIRONMENTAL CONDITIONS

- Operating temperature range : -20 to +60° C.
- Vibration: 10 Hz to 400 Hz, 10 g-c.
Random 0.4 g²/Hz from 10 to 400 Hz.
- Chock: ½ sinus 6 ms, 80 g.
- Acceleration: 80 g.
- Watertight: IP54.

DIMENSIONS

- 170 x 111 x 32 (mm).
- Weight : < 500 g.
- RF input connector : SMA.
- Power, programming connector & AGC output : Type « D ».
- Video output : SMA male

**Specifications subject to change without notice*